


# LEVELING MOUNTS

## >>> LE-Series


The Sunnex LE-Series consists of a rubber molding vulcanized onto a leveling bolt. The rubber molding has excellent friction on almost any surface and provides a safe and dependable installation.

The minimal stud length is well suited for both open hole and blind hole applications. Each model comes complete with nut and washer for leveling and locking in place. Standard rubber molds are gray in color, however LE 19 are also available in a high durometer black rubber for heavy loads.

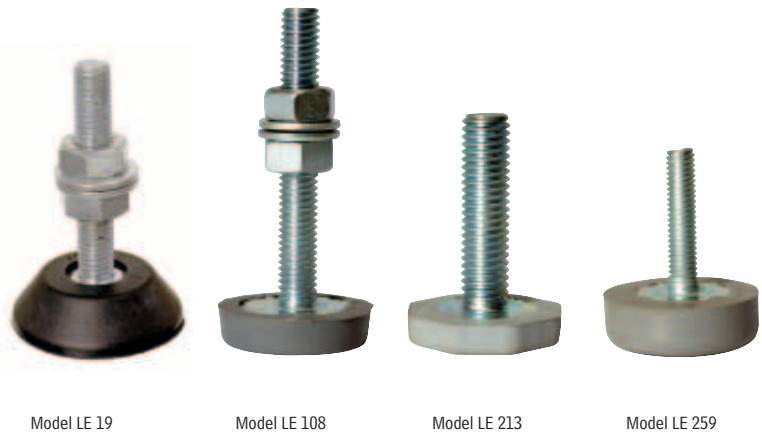


ADVANTAGES	APPLICATIONS
>> Wide range suitable for most applications	>> ASSEMBLY STATIONS
>> Galvanized and stainless steel leveling bolts with vulcanized rubber base	>> COMPRESSORS
>> Withstands loads up to 75 kg	>> OFFICE & HOUSEHOLD MACHINERY
	>> OUTSIDE MAINTENANCE EQUIPMENT
	>> SMALL MACHINES
	>> WOODWORKING MACHINES

### Dimensioned Drawings Sunnex LE-Series

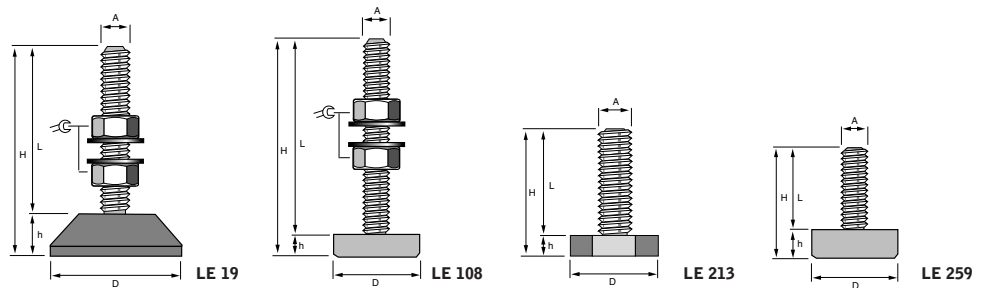

Model	Max load daN (kg)	Height, H mm	Diameter, D mm	Thread Type, A	Length, L mm	mm
LE 19-1*	40	50	46	M10 x 1.50	38	17
LE 19-2*	40	73	46	M10 x 1.50	60	17
LE 19-3*	75	50	46	M10 x 1.50	38	17
LE 19-4*	75	73	46	M10 x 1.50	60	17
LE 108	60	65	30	M8 x 1.25	57	13
LE 213	60	45	32	M10 x 1.50	38	13
LE 259**	30	38	30	M6 x 1.00	28	-

### Assembly example Sunnex LE-Series



\*Stainless Steel or Zinc Plated.

\*\*Supplied without nuts and washers.