

LEVELING MOUNTS

>>> LL-Series

Sunnex LL leveling mount are ideal for loads of up to 2000 kg. The LL-Series has a solid base design fitted with an anti-slip pad.

The precision ball and socket design of the swivel connection provides a smooth low friction interface from the equipment to the floor.




ADVANTAGES

- >> Articulated bolt allows inclination up to 10°
- >> With anti-slip rubber protection for stable installation
- >> Made of galvanized steel
- >> Withstands loads up to 2000 kg


APPLICATIONS

- >> ASSEMBLY STATIONS
- >> COMPRESSORS
- >> OFFICE & HOUSEHOLD MACHINERY
- >> OUTSIDE MAINTENANCE EQUIPMENT
- >> SMALL MACHINES
- >> WOODWORKING MACHINES

Assembly example
Sunnex LL-Series



Dimensioned Drawing
Sunnex LL-Series

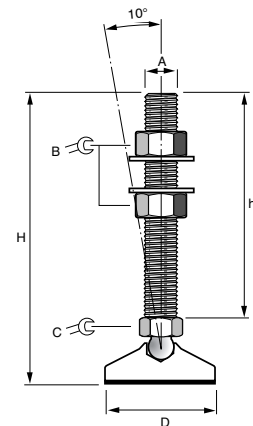

| Model | Max load* daN (kg) | Diameter, D mm | Height, H mm | Height, h mm | ⌀B mm | ⌀C mm | A |
|-------|-----------------------|-------------------|-----------------|-----------------|----------|----------|-----|
| LL 10 | 1000 | 32 | 105 | 75 | 19 | 14 | M12 |
| LL 12 | 1200 | 45 | 105 | 75 | 19 | 14 | M12 |
| LL 20 | 2000 | 60 | 110 | 80 | 22 | 16 | M14 |

* For loads at right angle to the articulated foot. Transverse loads and collapsing stresses will reduce the maximum permitted load.