

LEVELING MOUNTS: NYLON

>>> LN-Series, Swivel

Sunnex LN-Series leveling mounts are modular in design, consisting of two parts; a base and a threaded bolt. The mounts can be combined with any thread type and size, allowing you to specify the correct configuration for your application.


Sunnex LN-Series nylon leveling mounts support any type of machinery and equipment, from packaging machinery to office furniture. These mounts provide fast, easy, and precise leveling of all types of machinery and equipment, and are available with a variety of mounting options including free-standing, floor-anchoring, and anti-skid pads.



- >> Fast, easy, and precise leveling of all types of machines and equipment
- >> Wide variety of configurations
- >> Self-aligning without sacrificing stability
- >> No cementing or bolting needed
- >> Electrically non-conductive
- >> Flexible, non-scuff or scratch-resistant
- >> Cost-effective options
- >> +/-3 or /-20° range of motion available

APPLICATIONS

- >> ELECTRONICS EQUIPMENT
- >> CONVEYORS
- >> INDUSTRIAL SCALES
- >> MEDICAL EQUIPMENT
- >> PACKAGING MACHINERY

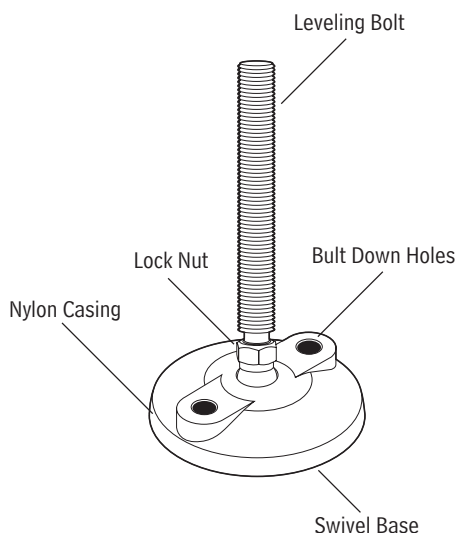

How to Select a Leveling Mount & Bolt

1. Select swivel configuration
2. Select diameter based on load requirements
3. Consider anti-skid options
4. Consider anchoring options
5. Select the base material
6. Match swivel bolt with base
7. Select bolt (material, thread and length)

LEVELING MOUNTS: NYLON

EXAMPLE OF ORDER: S 30 T A Y

Material	Y=Nylon
Anti-Skid Pad	A=Yes N=No
Anchoring Holes	B=Yes T=No
Diameter	
Type	S=Swivel



Swivel Base



Swivel Bolt



SWIVEL FOOTBASE	S30	S40	S60	S80	S100	S120
Diameter, mm	30	40	60	80	100	120
Height, mm	28	28	28	28	28	28
Length, mm	–	–	–	55	74	94
Hole diameter, mm	–	–	–	9	9	9
Max load, lbs	650	900	1000	1000	1400	1400
Max load, daN (kg)	300	400	450	450	650	650

SWIVEL THREADED BOLT	A	A	A	A	A	A	A
Length, 1.5 in	1/4-20	5/16-18	–	–	–	–	–
Length, 2.0 in	1/4-20	5/16-18	3/8-16	1/2-13	–	–	–
Length, 4.0 in	–	–	3/8-16	1/2-13	5/8-11	3/4-10	1-8
Length, 6.0 in	–	–	3/8-16	1/2-13	5/8-11	3/4-10	1-8
Length, 8.0 in	–	–	–	–	5/8-11	3/4-10	1-8
Length, 30 mm	M6	–	–	–	–	–	–
Length, 40 mm	M6	M6	M10	–	–	–	–
Length, 66 mm	–	–	–	M12	–	–	–
Length, 80 mm	–	M6	M10	–	–	–	–
Length, 100 mm	–	–	–	M12	M16	M20	M24
Length, 150 mm	–	–	M10	M12	M16	M20	M24
Length, 200 mm	–	–	–	–	–	M20	M24

STANDARD: The LN-Series does not include nut or washer.

ORDER INFORMATION: See page 31 for the LN-Series.