

LEVELING MOUNTS

>>> LL-Series

Sunnex LL leveling mount are ideal for loads of up to 2000 kg. The LL-Series has a solid base design fitted with an anti-slip pad.

The precision ball and socket design of the swivel connection provides a smooth low friction interface from the equipment to the floor.



 sunnex


ADVANTAGES

- >> Articulated bolt allows inclination up to 10°
- >> With anti-slip rubber protection for stable installation
- >> Made of galvanized steel
- >> Withstands loads up to 2000 kg


APPLICATIONS

- >> ASSEMBLY STATIONS
- >> COMPRESSORS
- >> OFFICE & HOUSEHOLD MACHINERY
- >> OUTSIDE MAINTENANCE EQUIPMENT
- >> SMALL MACHINES
- >> WOODWORKING MACHINES

Assembly example
Sunnex LL-Series

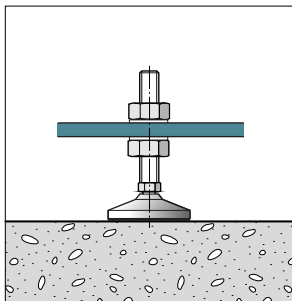

Dimensioned Drawing
Sunnex LL-Series

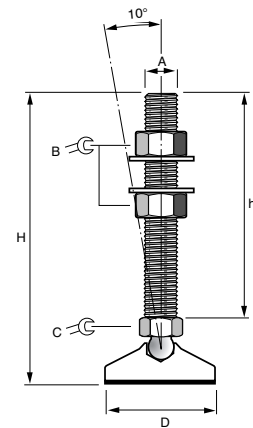

Model	Max load* daN (kg)	Diameter, D mm	Height, H mm	Height, h mm	⌀B mm	⌀C mm	A
LL 10	1000	32	105	75	19	14	M12
LL 12	1200	45	105	75	19	14	M12
LL 20	2000	60	110	80	22	16	M14

* For loads at right angle to the articulated foot. Transverse loads and collapsing stresses will reduce the maximum permitted load.